


## Product information VITOLEN 122

One-sided self-adhesive sealing tape of closed-cell soft elastic foam, which consists of a ethylene vinyl acetate copolymer. Reinforced by thread.

## Product composition

**carrier**, PE-foam, black or white  
**reinforcement**, thread  
**adhesive**, acrylic dispersion  
**liner**, siliconised film, white

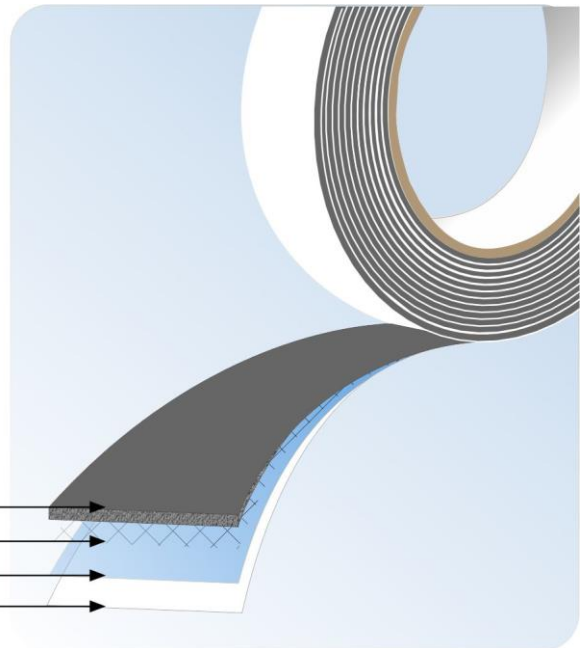

## Application

VITOLEN 122 is used for sealing, damping and insulating purposes.

## Product benefits

- soft and elastic foam
- very good adhesion on different surfaces
- very good thermal insulation properties
- the closed-cell foam hardly absorbs moisture

## Technical data and Productproperties

density (DIN 53420)	approx. 25 kg/m <sup>3</sup>
compressive strength (BS EN ISO 7214:2012) at 25 % at 50 %	41 kPa 100 kPa
hardness shore 00	43
compression set (BS EN ISO 7214:2012) 22 h at 23 °C and 25 % compression 0,5 h recovery 24 h recovery	13 % 5 %

## VITOLEN 122

water absorption	≤ 1 %
thermal conductivity (ISO 8302) at 10 °C	0.037 W/m·K
temperature resistance	-40 °C to 60 °C
application temperature	15 °C to 30 °C

### Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

### Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity out of direct sunlight, in original packaging

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

06/2017 MB