


## Product information VITOMOUNT 125 IT

Double-sided self-adhesive foam tape for high performance requirements with especially thin polyethylene foam.

## Product composition

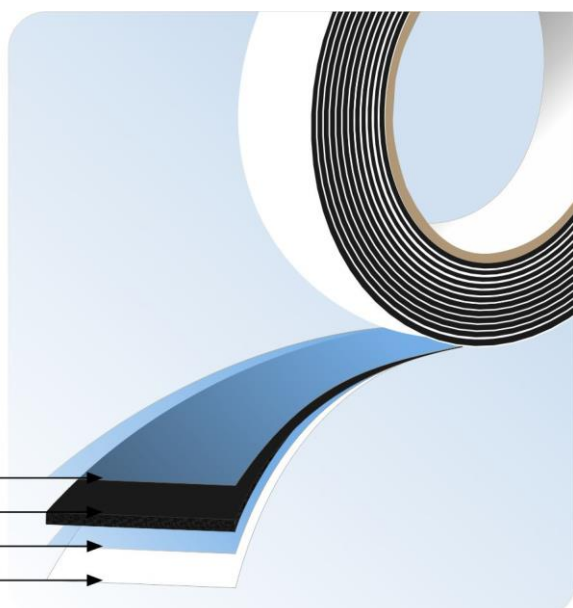

Adhesive, acrylate  
Carrier, PE foam, 0.4 mm, black  
Adhesive, acrylate  
Liner, siliconised PE-Paper, white

## Application

The tape is used for permanent bonding of materials with even or slightly uneven surfaces, indoor and outdoor. It is particularly appropriate for bonding electronic component parts.

## Product benefits

- Thin foam carrier
- Good initial and excellent final adhesive strength
- Very good ageing, weather and plasticiser resistance
- Compatible with acryl glass
- Compensating of slight unevenness and thermal expansion

## Technical data and product properties

peel adhesion on steel acc. DIN EN 1939:1996	at 20 °C	20 N / 25 mm
shear adhesion on steel acc. DIN EN 1943:1996	at 20 °C	40 N / 625 mm <sup>2</sup>
temperature resistance	-40 °C to 90 °C	
application temperature	15 °C to 30 °C	

## VITOMOUNT 125 IT

### Processing

The most important processing parameters and information on cleaning are listed in our "Instructions for the application of adhesive tapes".

### Storage and shelf life

12 months after receipt of goods, when stored at 18 °C and 60 % relative humidity, protected from sunlight, in original packaging.

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send an e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

12/2017 Fi