


Product information

VITOMOUNT 125 SO-31

Double-sided self-adhesive foam tape.

Product composition

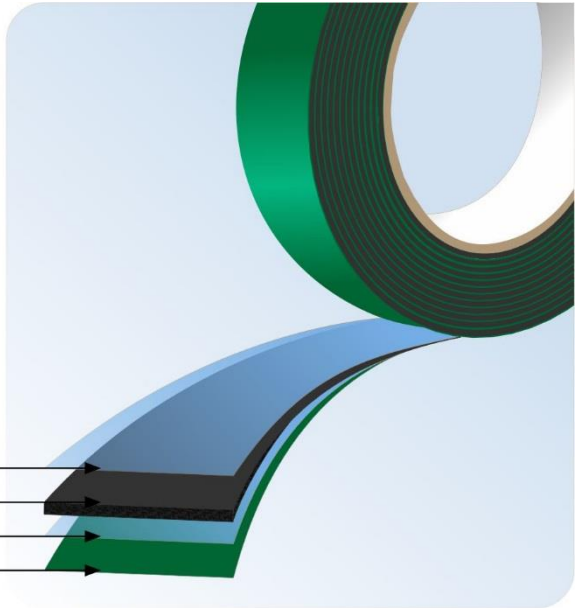

Adhesive, modified acrylate
Carrier, PE foam, anthracite or white
Adhesive, modified acrylate
Liner, siliconised film, green

Application

VITOMOUNT 125 SO-31 is used for adhesion on various surfaces as mounting aid for indoor and outdoor use and fastening of profiles followed by sealing.

Product benefits

- good adhesion on low energy surfaces
- high initial tack
- absorbs vibrations
- compensates slight roughnesses and thermal expansion

Technical data and product properties

thickness	2 and 3 mm	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	5 N / 25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C at 50 °C	15 N / 625 mm ² 5 N / 625 mm ²
temperature resistance	-40 °C to 70 °C	
application temperature	15 °C to 30 °C	

VITOMOUNT 125 SO-31

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

02/2018 MB