


Product information VITOMOUNT 125 SSC-70

Double-sided self-adhesive foam tape equipped with a modified acrylic adhesive.

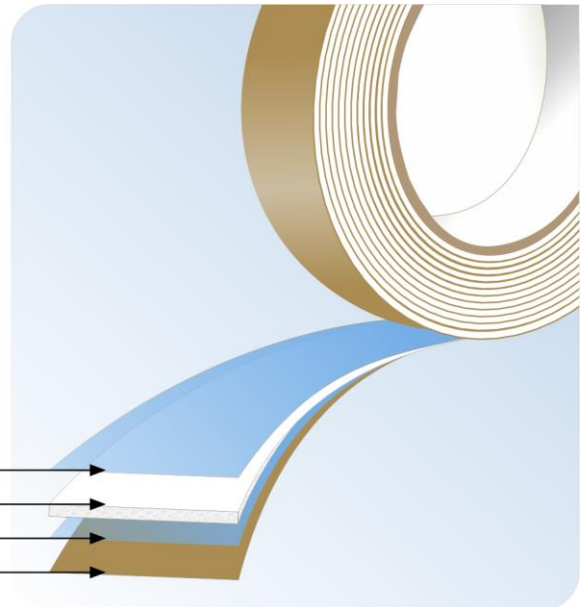

Product composition

Adhesive, acrylate
Carrier, PE-foam, anthracite or white
Adhesive, acrylate
Liner, siliconised paper, brown

Application

VITOMOUNT 125 SSC-70 is suitable for permanent mounting of materials for indoor and outdoor use. This tape is especially used for mounting scanner rails.

Product benefits

- high initial adhesion
- good adhesion on nonpolar surfaces, e.g. polyethylene (PE) and polypropylene (PP)

Technical data and product properties

thickness	1 mm	
colour	white or anthracite	
peel adhesion on steel at 20 °C acc. DIN EN 1939:1996 [N / 25 mm]	stainless steel	20*
	acrylic glass	20*
	ABS	20*
	PC	20*
	PE	20*
	PVC scanner rail	20*
shear adhesion on steel at 20 °C acc. DIN EN 1943:1996	10 N / 625 mm ²	
UV- and weather resistance	good	
temperature resistance	-40 °C to 80 °C	
application temperature	2 °C to 40 °C	

*foam split

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

12/2014 Ki