


**Product information**  
**VITOMOUNT 125 SSPR-100 PLG1**

Double-sided self-adhesive foam tape.

**Delivery form**

Bobbins or rolls.

**Product composition**

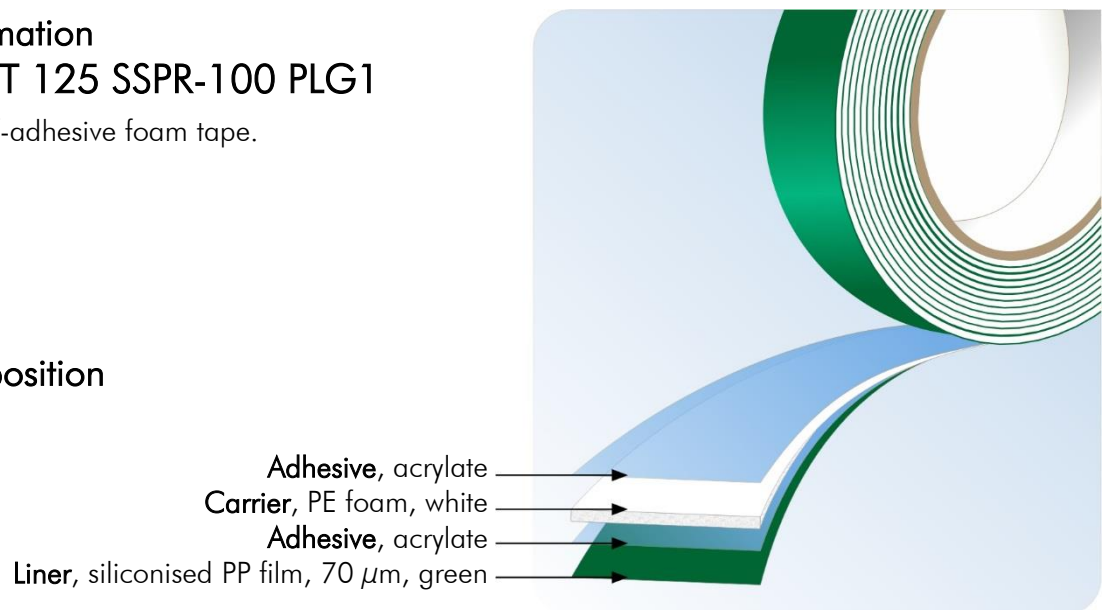

**Application**

VITOMOUNT 125 SSPR-100 PLG1 is used for permanent mounting of even and slightly rough surfaces for indoor and outdoor applications.

**Product benefits**

- high initial tack and high final adhesive strength
- very good aging, weathering and plasticiser resistance
- absorbs vibrations
- compensates slight roughnesses and thermal expansion

**Technical data and product properties**

thickness	0.8 mm	
colour	white	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	20 N/25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C	40 N/625 mm <sup>2</sup>
	at 50 °C	30 N/625 mm <sup>2</sup>
	at 70 °C	20 N/625 mm <sup>2</sup>
temperature resistance	-40 °C to 100 °C	
application temperature	15 °C to 30 °C	

## Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

## Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

## Product alternatives

VITOMOUNT 125	PE foam	liner	delivery forms
SSPR-70 PLG1	1 and 1.6 mm	siliconised PP film, 70 µm, green	rolls and bobbins
SSPR-70 FBL	1 and 1.6 mm	siliconised PP film, 50 µm, blue	rolls and bobbins
SSPR-70 FG	1 and 1.6 mm	siliconised HDPE film, 100 µm, yellow	rolls and bobbins
SSPR-70 PBR	1 and 1.6 mm	siliconised paper, brown	rolls and die cuts
SSPR-70 S 002	1 and 1.6 mm	siliconised PE-paper, 167 µm, white	rolls, bobbins and die cuts

Some of the above alternatives are manufactured to order.

## Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

06/2015 Ki