


Product information

VITOMOUNT 125 SSPR-70 ESK

One-sided self-adhesive foam tape.

Product composition

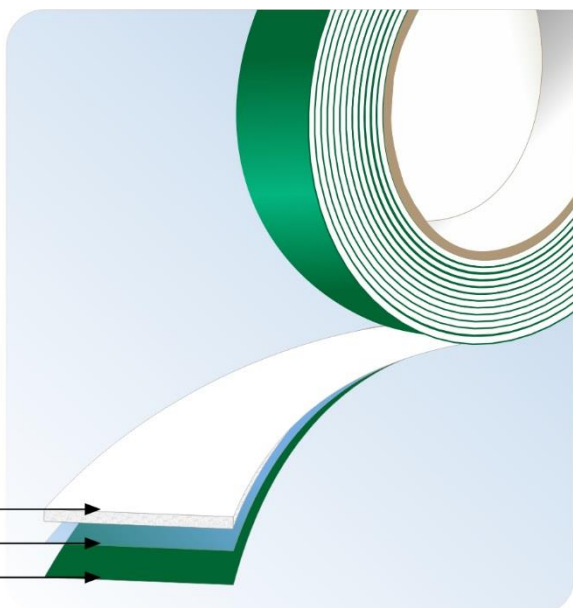

Carrier, PE foam, anthracite or white
 Adhesive, acrylate
 Liner, siliconised PP film, 70µm, green

Application

VITOMOUNT 125 SSPR-70 ESK is used for sealing and damping of shocks, noises and vibrations.

Product benefits

- high initial tack and high final adhesive strength
- very good aging, weathering and plasticiser resistance
- absorbs vibrations

Technical data and product properties

thickness	1 or 1.6 mm
color	white or anthracite (1.6 mm in anthracite on request)
foam density (DIN EN ISO 845)	55 kg/m ³
compressive strength (DIN EN ISO 3368-1) at 25 % at 50 %	50 kPa 120 kPa
compression set (DIN EN ISO 1856-C) 22h at 23 °C and 25 % compression 0.5 h after discharge 24 h after discharge	17 % 3 %
temperature resistance	-40 °C to 100 °C
application temperature	15 °C to 30 °C

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmten.de

06/2015 Ki