


## Preliminary product information VITOMOUNT SU 100 FBL2

Double-sided self-adhesive foam tape for a wide range of applications.

### Product composition

**Adhesive**, modified acrylate  
**Carrier**, PE foam, black, 0.8 mm  
**Adhesive**, modified acrylate  
**Liner**, siliconised PP film, 112 µm, blue

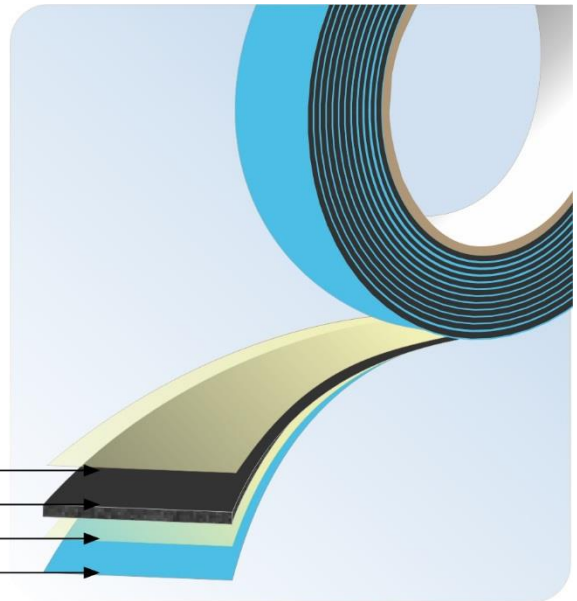

### Application

The adhesive of VITOMOUNT SU 100 FBL2 is characterised by the balance between adhesive strength, tack and cohesion. Therefore the foam tape is used multifunctional to connect different materials.

### Technical data and product properties

thickness	0.8 mm	
colour	black	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	30 N/25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C at 50 °C at 70 °C	30 N/625 mm <sup>2</sup> 15 N/625 mm <sup>2</sup> 5 N/625 mm <sup>2</sup>
temperature resistance	-40 °C to 100 °C	
aging resistance	good	
application temperature	15 °C to 30 °C	

### Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

## VITOMOUNT SU 100 FBL2

### Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

### Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

07/2016 Fi