


## Product information

### VITOCOLL 238A08

Transfer tape based on a modified acrylate.

## Product composition

Adhesive, modified acrylate  
Liner, siliconised paper, white

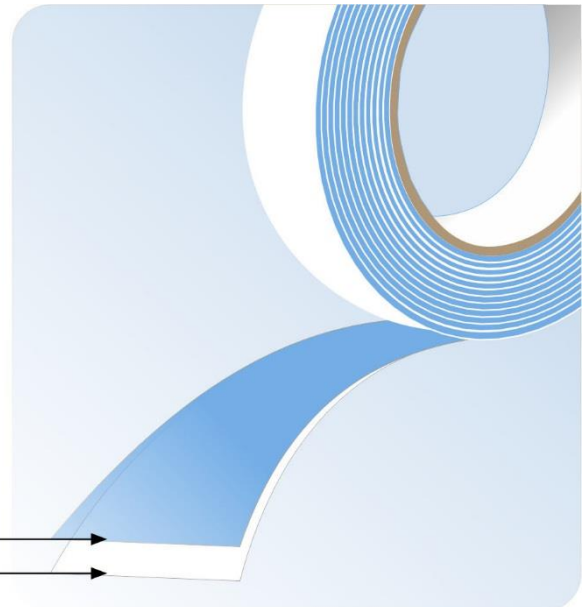

## Application

VITOCOLL 238A08 is used for self-adhesive finishing of materials like felt, film, paper, elastomer and tissue.

## Product benefit

- suitable for bonding of low energy surfaces such as PE and PP
- the thin adhesive film enables to design thin constructions
- compatible with acrylic glass

## Technical data and product properties

thickness	0.08 mm	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	17 N / 25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C	15 N / 625 mm <sup>2</sup>
temperature resistance	-40 °C to 90 °C	
application temperature	15 °C to 30 °C	
weathering resistance	good	
compatibility with acrylic glass	yes	

## Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

## Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

## Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

07/2015 Ru