


## Technical product information VITOF OAM PE Stapelscheiben (distance and shipping pads)

The product consists of a PE-foam, equipped with a low adhesion pressure sensitive acrylic adhesive.

### Product composition

carrier, PE-foam, blue, 3 mm  
 laminating adhesive  
 PET film  
 adhesive, acrylic, low adhesion  
 liner, siliconised paper, white

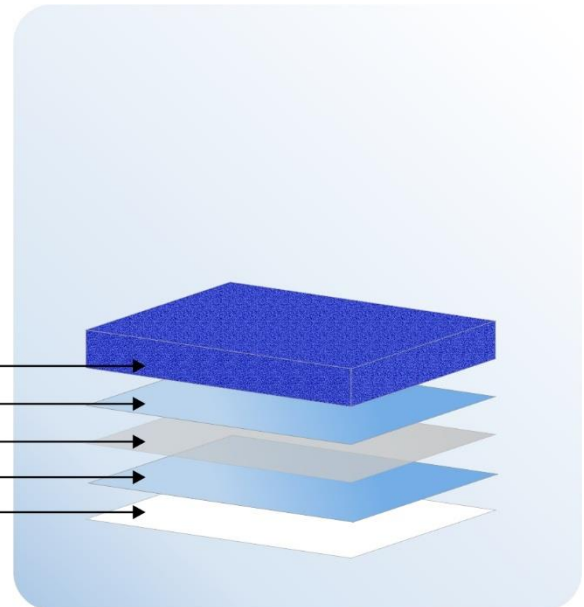

### Application

VITOF OAM PE Stapelscheiben are used as distance pads for transporting.

### Product benefits

- clean removable
- the flexible PE foam causes no scratches on sensitive surfaces

### Technical data and product properties

density		125 kg/m <sup>3</sup>
thickness		3 mm
compressive strength (DIN EN ISO 3386-1)	at 25 % deformation at 40 % deformation at 50 % deformation	240 kPa 300 kPa 390 kPa
compression set at 25 % deformation (DIN EN ISO 1856-C)	0.5 h after discharge 24 h after discharge	9 % 4,4 %
water absorption (DIN 53 428)		max. 1 %
temperature resistance		-40 °C to 70 °C

## VITOFoAM PE Stapelscheiben

### Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

### Storage and shelf life

6 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

05/2016 jk