


Technical product information VITOKORK Abstandhalter Plus S 001

The product consists of agglomerated cork bonded with polyurethane equipped with a low tack pressure sensitive acrylic adhesive on one side.

Product composition

- Carrier**, agglomerated cork bonded with polyurethane
- Adhesive**, acrylate
- Reinforcement**, PET film
- Adhesive**, acrylate
- Liner**, siliconised paper, white

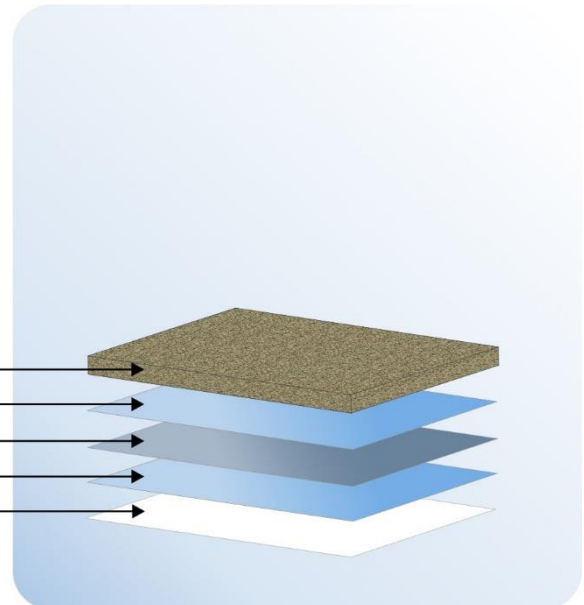

Application

VITOKORK Abstandhalter Plus S 001 are used for stacking and spacing. The preferred use is the application on plastic windows without film protection and for varnished surfaces.

Product benefits

- repositionable
- clean removable
- high compression resistance

Technical data and product properties

foam density (DIN EN ISO 845)	ca. 190 kg/m ³	
thickness	7 mm to 40 mm	
compression (DIN EN ISO 3386)	10 %	55 N/cm ²
	20 %	95 N/cm ²
	30 %	135 N/cm ²
	40 %	175 N/cm ²
	50 %	245 N/cm ²

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at room temperature and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

01/2015 Ki