


## Product information VITOTAPE 2200

The product consists of a one-sided self-adhesive polyethyleneterephthalate film coated with an acrylic adhesive.

## Product composition

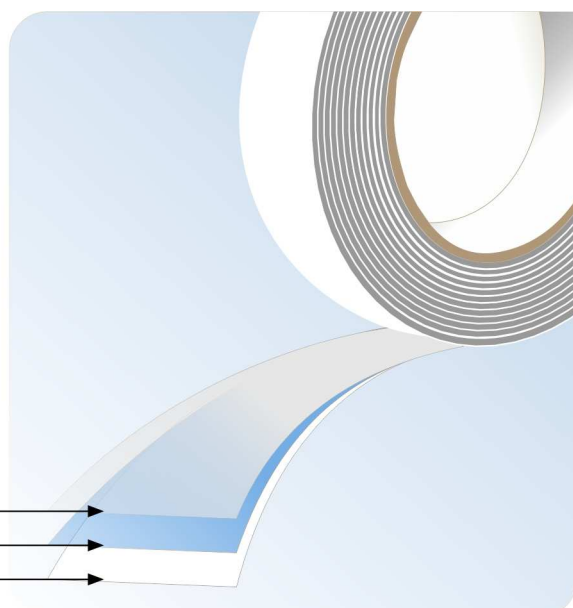

Carrier, PET film, 50 µm  
Adhesive, Acrylic  
Liner, siliconized paper, white

## Application

VITOTAPE 2200 has a good adhesion to many different surfaces. It is used to bond heating pipe foam insulation.

## Product benefit

- high temperature resistance of the adhesive
- good adhesion to many different surfaces

## Technical data and product properties

thickness (without liner)	0.09 mm	
thickness (with liner)	0.2 mm	
peel adhesion i. A. DIN EN 1939:1996	stainless steel at 20 °C	10 N/25mm
shear adhesion i. A. DIN EN 1943:1996	stainless steel at 20 °C	20 N/625mm <sup>2</sup>
temperature resistance	-40 °C to +120 °C	
weathering resistance	good	
UV resistance	good	
compatibility with acrylic glass	yes	

## Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

## Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

## Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

version: 08/2014 Ru