


## Product information

### VITOKORK Stapelscheiben (distance and shipping pads)

The pads are based on agglomerated PUR-bonded cork equipped with a low-adherent adhesive on one side.

## Product composition

**carrier**, agglomerated composition cork  
**laminating adhesive**  
**subcarrier**, PET-Film  
**adhesive**, acrylic PSA  
**liner**, siliconised paper, white

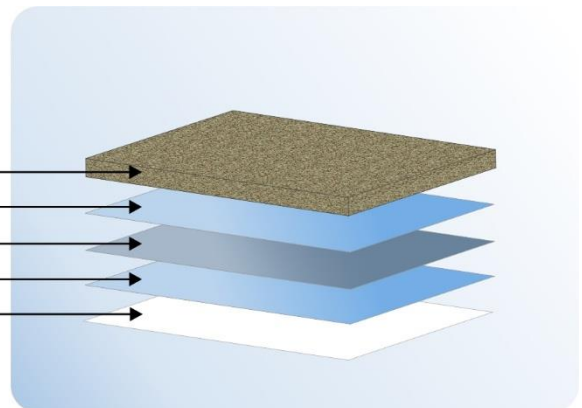

## Application

VITOKORK Stapelscheiben are used as distance and shipping pads on glass.

## Product benefits

- clean removable
- shock-absorbing
- high compression resistance

## Technical data and product properties

thickness	2 mm, 3 mm, 4 mm or 6 mm	
density cork (DIN EN ISO 845)	approx. 190 kg/m <sup>3</sup>	
compression strength (DIN EN ISO 3386)	10 %	30 N/cm <sup>2</sup>
	20 %	50 N/cm <sup>2</sup>
	30 %	70 N/cm <sup>2</sup>
	40 %	90 N/cm <sup>2</sup>
	50 %	110 N/cm <sup>2</sup>
temperature resistance	-40 °C to 70 °C	

## Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

## VITOKORK Stapelscheiben (distance pads)

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

version: 08/2015 Fi