


Product information

VITOCOLL 242B14

Thin adhesive tape based on a polyester film equipped with a modified acrylate on both sides.

Product composition

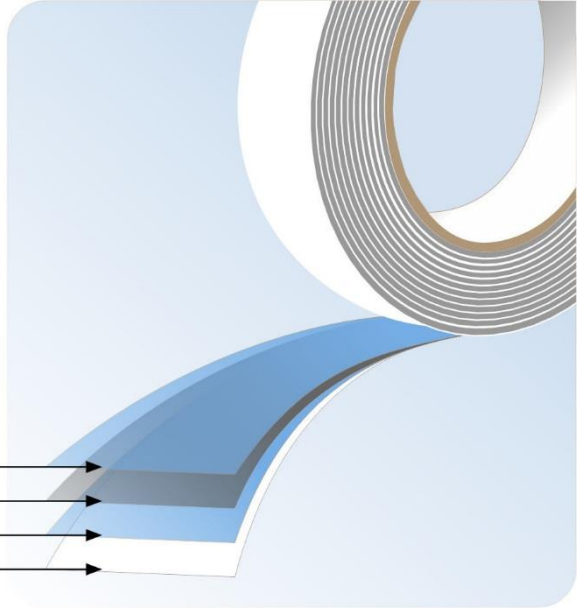

Adhesive, modified acrylate
Carrier, polyester film, 15 μ m
Adhesive, modified acrylate
Liner, siliconised paper, white

Application

VITOCOLL 242B14 is used for self-adhesive finishing of materials like felt, film, paper, foam and tissue.

Product benefit

- high initial tack
- good adhesion on low energy surfaces such as PE, PP and rubber
- compatible with acrylic glass

Technical data and product properties

thickness	0.14 mm	
peel adhesion stainless steel acc. to DIN EN 1939:1996	at 20 °C	20 N / 25 mm
shear adhesion stainless steel acc. to DIN EN 1943:1996	at 20 °C	20 N / 625 mm ²
temperature resistance	-40 °C to 90 °C	
application temperature	15 °C to 30 °C	
weathering resistance	good	
compatibility with acrylic glass	yes	

VITOCOLL 242B14

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

05/2015 Ki