


Product information

VITOCOLL 342E08 FBL

The product is an adhesive transfer film reinforced by thread. The adhesive is solvent-free and modified with flame retardants.

Product composition

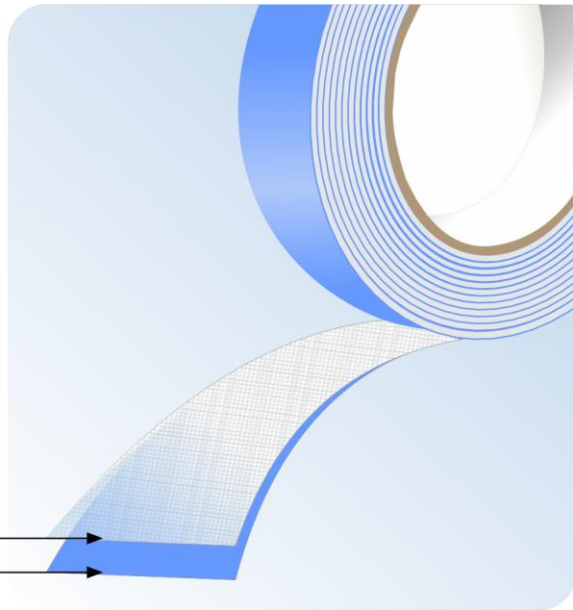

Adhesive, acrylic dispersion with thread
Liner, siliconised film, blue

Application

VITOCOLL 342E08 FBL is used for applications where a high adhesive strength is recommended. It is suitable to bond low-energy surfaces.

Product benefit

- Adhesive is flame retardant
- Film release liner enables proper removal without liner tear
- High adhesion
- Suitable for bonding on low-energy surfaces

Technical data and product properties

thickness	0.08 mm	
peel adhesion according to DIN EN 1939:1996	stainless steel at 20 °C	15 N/25mm
shear adhesion according to DIN EN 1943:1996	stainless steel at 20 °C	10 N/625mm ²
temperature resistance	-40 °C to +80 °C	

VITOCOLL 342E08 FBL

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

Version: 02/2016 MB