


Product information

VITOMOUNT 125 S-30 FBL2

Double-sided self-adhesive foam tape with high initial tack

Product composition

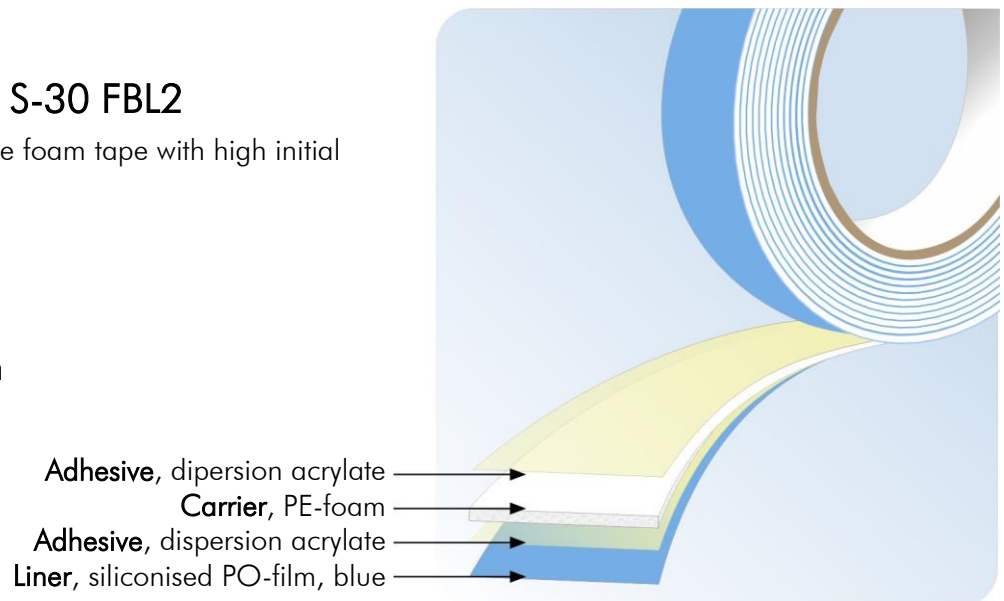

Application

VITOMOUNT 125 S-30 FBL2 is particularly suited to mount wooden georgian bar profiles prior to final sealing.

Product benefits

- High initial adhesive strength
- Suitable for low-energy surfaces
- Compensating of unevenness and thermal expansion

Technical data and product properties

thickness		2, 3 and 4 mm
peel adhesion on steel acc. DIN EN 1939:1996	at 20 °C	foam failure
shear adhesion on steel acc. DIN EN 1943:1996	at 20 °C	10 N/625mm ²
temperature resistance		-40 °C to 90 °C

Processing

The most important processing parameters and information on cleaning are listed in our instructions for the application of adhesive tapes.

VITOMOUNT 125 S-30 FBL2

Storage and shelf life

12 months after receipt of goods, when stored at room temperature ($20 \pm 3 \text{ }^\circ\text{C}$) and 40 - 60 % relative humidity, protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. We reserve the right to make technical changes that are in the interest of progress. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

10/2020 Fi