


## Product information VITOPLAST 130 EP S 001

One-sided self-adhesive sealing tape. It consists of polyurethane foam based on polyester, reinforced by polyester film.

## Product composition

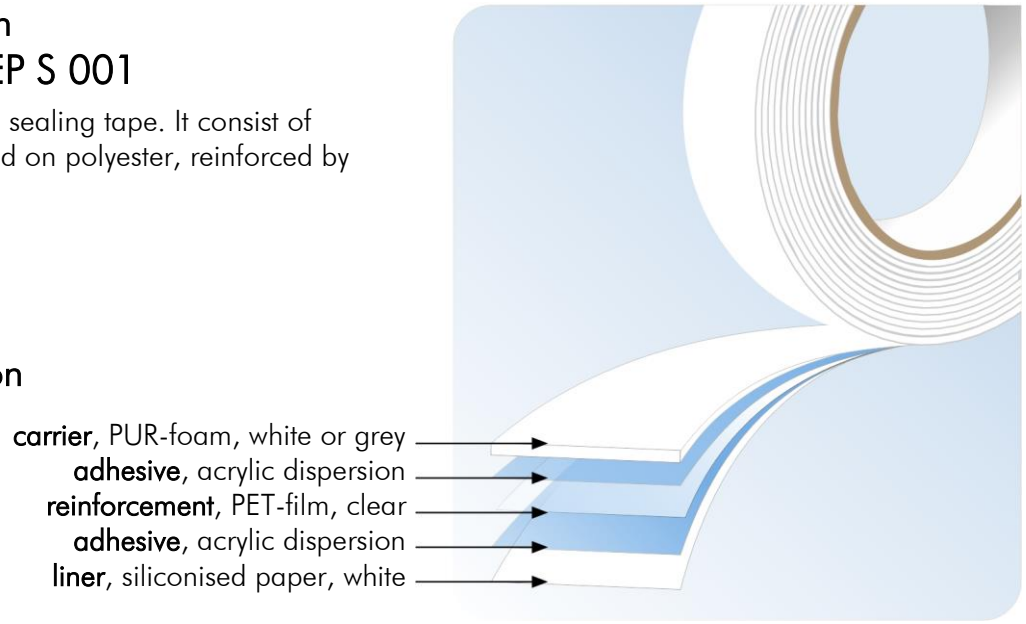

**carrier**, PUR-foam, white or grey  
**adhesive**, acrylic dispersion  
**reinforcement**, PET-film, clear  
**adhesive**, acrylic dispersion  
**liner**, siliconised paper, white

## Application

The product is appropriate for sealing, damping and protecting.

## Product benefits

- Excellent resilience due to the open-cell structure
- good adhesion on different surfaces
- very good adaption to uneven surfaces
- with paper for die cutting

## Technical data and product properties

|  |                      |
|--|----------------------|
| thickness  | 3, 6 and 9 mm        |
| density (DIN EN ISO 845)                                     | 28 kg/m <sup>3</sup> |
| compressive strength (DIN EN ISO 3386-1) at 40 % deformation | 4 to 6 kPa           |
| weathering resistance  | good                 |
| temperature resistance                                       | -20 °C to 120 °C     |

## VITOPLAST 130 EP S 001

### Processing

The most important processing parameters and information on cleaning are listed in our "Instructions for the application of adhesive tapes".

### Storage and shelf live

12 month after receipt of goods, when stored at 23 °C and 50 % relative humidity out of direct sunlight, in original packaging

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

02/2018 Fi